


D3KB10 Thru D3KB100

High Current Glass Passivated Molding Single-Phase Bridge Rectifier

Reverse Voltage 100 to 1000V Forward Current 3.0 A

FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

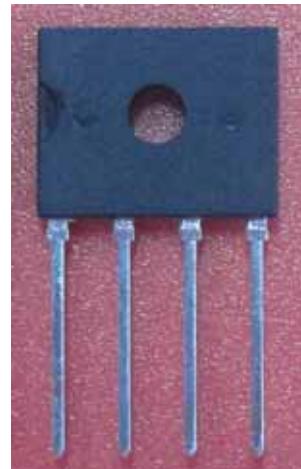

1. Maximum & Thermal Characteristics Ratings at 25° ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	D3KB10	D3KB20	D3KB40	D3KB60	D3KB80	D3KB100	Unit
Maximum repetitive voltage	V _{RRM}	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25°	IR	5						μA
at rated DC blocking voltage TA=125°		500						
Average rectified forward current T _c =100°	I _o	3						A
60Hz Sine wave Resistance load TA=40°		1.2						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	90						A
Rating of fusing (t<8.3ms)	I ² t	35						A ² sec
Max instantaneous forward voltage at 2.0A	VF	1.05						V
Dielectric strength terminals to case , AC 1 minute Current 1mA	V _{dia}	2.5						KV
Maximum thermal on P.C.B. without heat-sink	R _{θJA}	13.7						/W
resistance per leg on Al plate heat-sink	R _{θJC}	5.2						
Operating junction temperature	T _J	-55~150						
Storage temperature	T _{stg}	-55~150						

D3KB10 Thru D3KB100

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

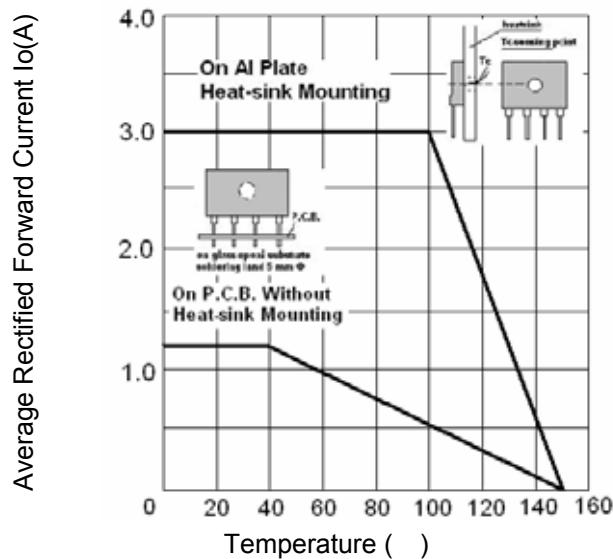


Fig.2 Typical Reverse Characteristics

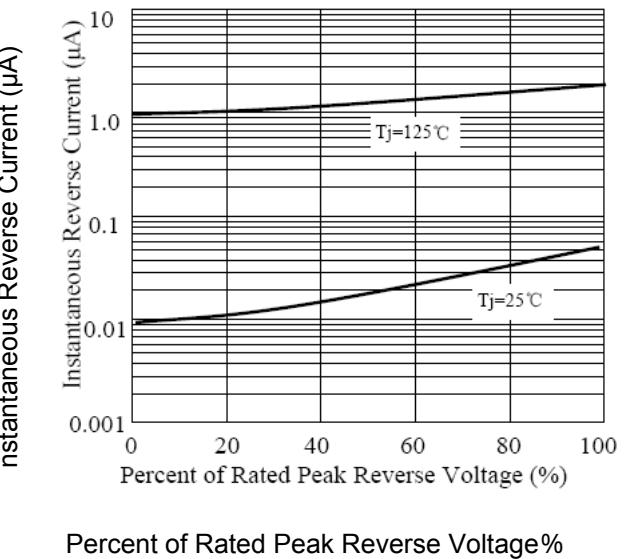


Fig.3 Forward Voltage



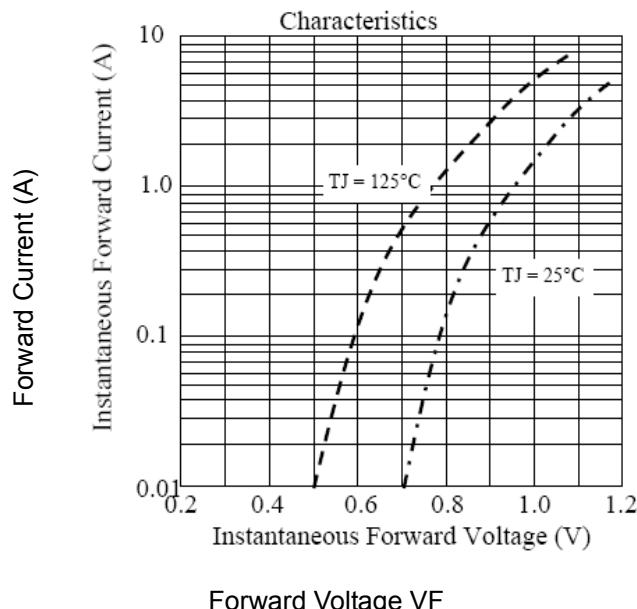


Fig.4 Peak Surge Forward Capability

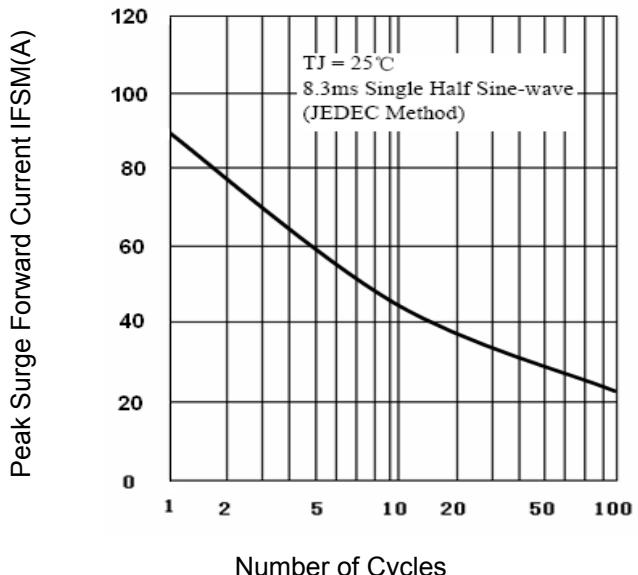

D3KB10 Thru D3KB100


3. Marking Identification

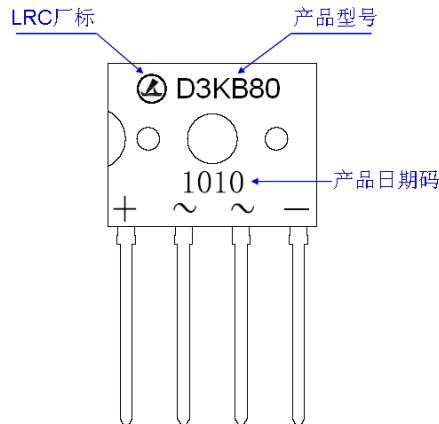

Note :

生产日期码包含4位数字，例如“1010”，前两个数字“10”表示为2010年，另外二个数字“10”是指第10周，即表示该产品为2010年10周生产。

型号 : **D** **3** **KB** **80**

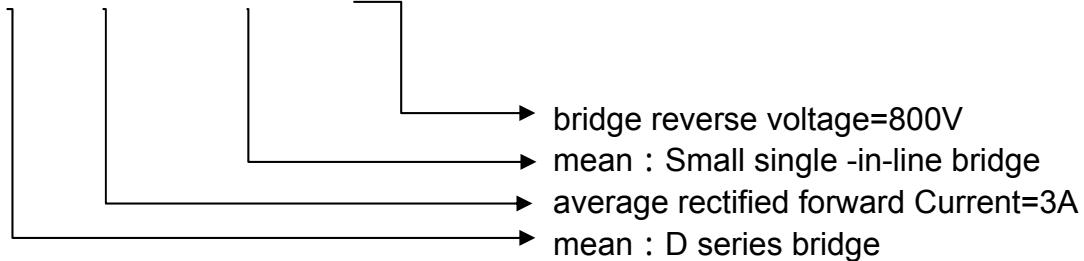

4. Dimension

