


# 1N5913 THRU 1N5956

## ZENER DIODES

Zener Voltage: 3.3-200V Peak Pulse Power: 3.0W

### DO-41

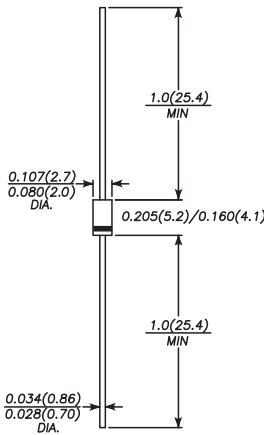

Dimensions in inches and (millimeters)

### FEATURES

- ZENER impedance at low current is small
- High reliability
- High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length

### MECHANICAL DATA

**Case:** Molded plastic

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode

**Mounting Position:** Any

Type No.	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
	VZ@IZT (V)	IZT (mA)	ZZT@IZT ( $\Omega$ )	ZZK@IZK ( $\Omega$ )	IZK (mA)	IR @ VR ( $\mu$ A)	VR (V)	IZM (mA)
1N5913	3.3	113.6	10	500	1.0	100	1.0	454
1N5914	3.6	104.2	9.0	500	1.0	75	1.0	416
1N5915	3.9	96.1	7.5	500	1.0	25	1.0	384
1N5916	4.3	87.2	6.0	500	1.0	5.0	1.0	348
1N5917	4.7	79.8	5.0	500	1.0	5.0	1.5	319
1N5918	5.1	73.5	4.0	350	1.0	5.0	2.0	294
1N5919	5.6	66.9	2.0	250	1.0	5.0	3.0	267
1N5920	6.2	60.5	2.0	200	1.0	5.0	4.0	241
1N5921	6.8	55.1	2.5	200	1.0	5.0	5.2	220
1N5922	7.5	50.0	3.0	400	0.5	5.0	6.0	200
1N5923	8.2	45.7	3.5	400	0.5	5.0	6.5	182
1N5924	9.1	41.2	4.0	500	0.5	5.0	7.0	164
1N5925	10	37.5	4.5	500	0.25	5.0	8.0	150
1N5926	11	34.1	5.5	550	0.25	1.0	8.4	136
1N5927	12	31.2	6.5	550	0.25	1.0	9.1	125
1N5928	13	28.8	7.0	550	0.25	1.0	9.9	115
1N5929	15	25.0	9.0	600	0.25	1.0	11.4	100
1N5930	16	23.4	10	600	0.25	1.0	12.2	93
1N5931	18	20.8	12	650	0.25	1.0	13.7	83
1N5932	20	18.7	14	650	0.25	1.0	15.2	75
1N5933	22	17.0	17.5	650	0.25	1.0	16.7	68
1N5934	24	15.6	19	700	0.25	1.0	18.2	62
1N5935	27	13.9	23	700	0.25	1.0	20.6	55
1N5936	30	12.5	28	750	0.25	1.0	22.8	50
1N5937	33	11.4	33	800	0.25	1.0	25.1	45
1N5938	36	10.4	38	850	0.25	1.0	27.4	41
1N5939	39	9.6	45	900	0.25	1.0	29.7	38
1N5940	43	8.7	53	950	0.25	1.0	32.7	34
1N5941	47	8.0	67	1000	0.25	1.0	35.8	31
1N5942	51	7.3	70	1100	0.25	1.0	38.8	29
1N5943	56	6.7	86	1300	0.25	1.0	42.6	26
1N5944	62	6.0	100	1500	0.25	1.0	47.1	24
1N5945	68	5.5	120	1700	0.25	1.0	51.2	22
1N5946	75	5.0	140	2000	0.25	1.0	56	20
1N5947	82	4.6	160	2500	0.25	1.0	62.2	18
1N5948	91	4.1	200	3000	0.25	1.0	69.2	16
1N5949	100	3.7	250	3100	0.25	1.0	76	15
1N5950	110	3.4	300	4000	0.25	1.0	83.6	13
1N5951	120	3.1	380	4500	0.25	1.0	91.2	12
1N5952	130	2.9	450	5000	0.25	1.0	98.8	11
1N5953	150	2.5	600	6000	0.25	1.0	114	10
1N5954	160	2.3	700	6500	0.25	1.0	121.6	9.0
1N5955	180	2.1	900	7000	0.25	1.0	136.8	8.0
1N5956	200	1.9	1200	8000	0.25	1.0	152	7.0